

DK-VISION H




DK-VISION H

TECHNICAL SPECIFICATIONS

Configuration	Top-Down projection
FOV	40° full overlap
Transparency	Industry leading
Thickness of waveguide	~ 1.7 mm
Resolution	Full-color 1080p resolution per eye at 60 fps
Sensor bench mount	Mechanical support for cameras and sensors
Audio output	3.5 mm audio jack
USB ports (type and function)	USB-C for power; micro-USB for data
Video input	Micro-HDMI input
Included Accessories	USB to micro-USB adaptor

* Frameless Lumus Development Kits are available upon request

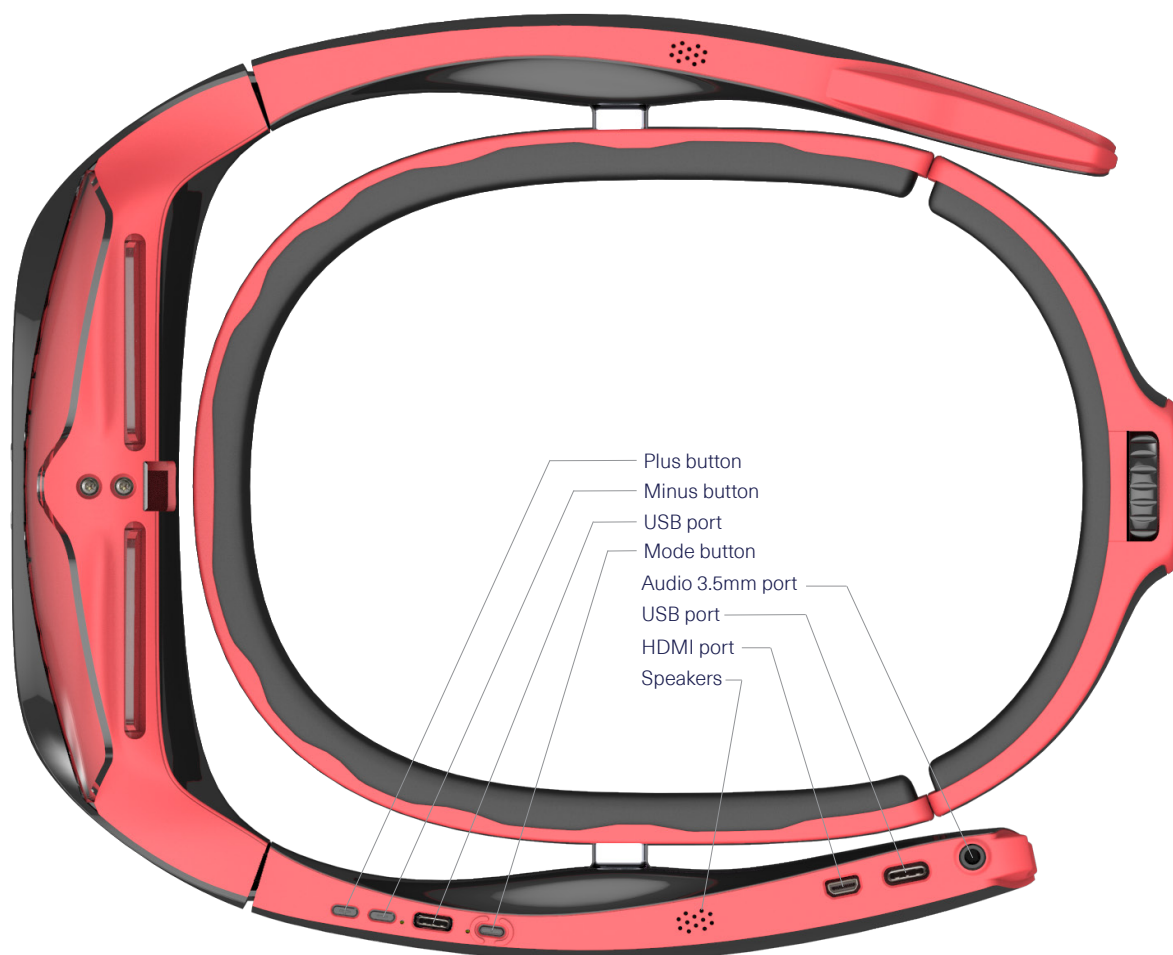

For more information:

wiki.lumus-optical.com
www.lumusvision.com

Communication, inquiries and requests should be submitted to the following:

Phone: +972 8 947 3361
info@lumus-optical.com

* All specifications are subject to change without notice

